




Supplementary Material: High cycle fatigue S-N curve prediction of steels based on transfer learning guided convolutional neural network

Xiaolu Wei¹, Chenchong Wang¹, Zixi Jia², Wei Xu¹

¹State key laboratory of rolling and automation, Northeastern University, Shenyang, Liaoning 110819, China

²Faculty of robot science and engineering, Northeastern University, Shenyang, Liaoning 110819, China

Correspondence to: Prof. Wei Xu, State key laboratory of rolling and automation, Northeastern University, NO. 3-11, Wenhua Road, Heping District, Shenyang 110819, China. E-mail: xuwei@ral.neu.edu.cn

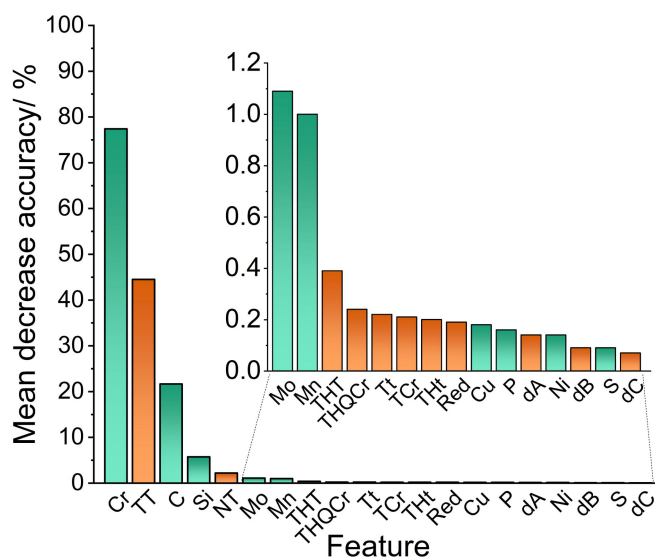


Supplementary Figure 1. Mean decrease accuracy (MDA, represents the importance of features on the property prediction) results of features in the rotating bending dataset used.



© The Author(s) 2022. Open Access This article is licensed under a Creative Commons Attribution 4.0 International License (<https://creativecommons.org/licenses/by/4.0/>), which permits unrestricted use, sharing, adaptation, distribution and reproduction in any medium or

format, for any purpose, even commercially, as long as you give appropriate credit to the original author(s) and the source, provide a link to the Creative Commons license, and indicate if changes were made.



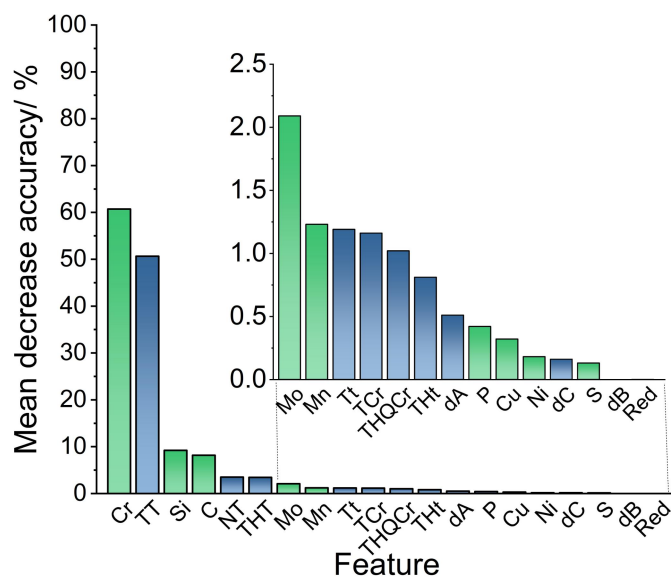

12
13
14
15
16
17

Supplementary Figure 2. Mean decrease accuracy (MDA, represents the importance of features on the property prediction) results of features in the reversed torsion dataset used.

Supplementary Table 1. Non-TR-CNN model performance at different model parameter settings.

Model settings	MAE/ MPa		
	Training set	Testing set	Validation set
Basic model			
(Convolution: 5×5×32, 5×5×64; Full connection: 128, 64; Dropout: 0.4)	2.58 ± 0.65	38.23 ± 22.75	41.76 ± 10.97
Dropout: 0.1	1.23 ± 0.20	38.39 ± 22.49	42.15 ± 12.92
Dropout: 0.2	1.80 ± 0.52	40.40 ± 29.87	43.17 ± 12.87
Dropout: 0.3	1.92 ± 0.42	36.92 ± 19.52	40.43 ± 11.09
Dropout: 0.5	2.84 ± 0.67	36.06 ± 20.07	40.54 ± 10.84
Convolution: 5×5×64	2.54 ± 0.50	40.76 ± 30.03	41.70 ± 11.59
Convolution: 5×5×4, 5×5×8	2.26 ± 0.50	37.11 ± 17.75	41.72 ± 8.87
Convolution: 5×5×8, 5×5×16	2.25 ± 0.50	35.96 ± 12.39	42.36 ± 8.94
Convolution: 5×5×16, 5×5×32	2.25 ± 0.35	35.92 ± 15.01	40.75 ± 8.72
Convolution: 5×5×16, 5×5×32, 5×5×64	2.34 ± 0.39	40.50 ± 24.98	40.62 ± 9.52
Full connection: 64	3.65 ± 0.77	36.84 ± 20.65	41.20 ± 11.15
Full connection: 256	1.69 ± 0.36	36.29 ± 21.16	39.82 ± 10.20
Full connection: 512	1.47 ± 0.29	36.95 ± 21.91	41.16 ± 9.77
Fully connection: 128, 128, 64	3.60 ± 0.55	36.03 ± 20.11	42.07 ± 13.02

18